




# KOYO BEARING LTD

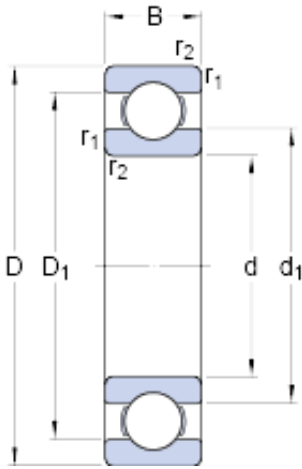

## 25 mm x 80 mm x 21 mm skf 6405 bearing

Bearing No. 6405

6405 Bearing 2D drawings and 3D CAD models

Size	80x25x21 mm
Bore Diameter	80 mm
Outer Diameter	25 mm
Width	21 mm
d	25 mm
D	80 mm
B	21 mm
d <sub>1</sub>	45.42 mm
D <sub>1</sub>	62.9 mm
r <sub>1,2</sub> - min.	1.5 mm
d <sub>a</sub> - min.	34 mm
D <sub>a</sub> - max.	71 mm
r <sub>a</sub> - max.	1.5 mm
Basic dynamic load rating - C	35.8 kN
Basic static load rating - C <sub>0</sub>	19.3 kN
Fatigue load limit - P <sub>u</sub>	0.815 kN
Reference speed	20000 r/min
Limiting speed	13000 r/min
Calculation factor - k <sub>r</sub>	0.035
Calculation factor - f <sub>0</sub>	12.1
Category	Single Row Ball Bearings
Inventory	7.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.546



## KOYO BEARING LTD

EAN	7316576608865
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	25MM Bore; 80MM Outside Diameter; 21MM Outer Race Diameter; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	6405
Weight / LBS	1.2
Outer Race Width	0.827 Inch   21 Millimeter
Outside Diameter	3.15 Inch   80 Millimeter
Bore	0.984 Inch   25 Millimeter
bore diameter:	25 mm
static load capacity:	19.3 kN
outside diameter:	80 mm
precision rating:	ABEC 3 (ISO Class 6)



## KOYO BEARING LTD

overall width:	21 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Open
outer ring width:	21 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	1.5 mm
snap ring included:	Without Snap Ring
maximum rpm:	13000 RPM
internal clearance:	C0
series:	64
dynamic load capacity:	35.8 kN
$d_1$	45.42 mm
$D_1$	62.9 mm
$r_{1,2}$ min.	1.5 mm
$d_a$ min.	34 mm
$D_a$ max.	71 mm
$r_a$ max.	1.5 mm
Basic dynamic load rating C	35.8 kN
Basic static load rating $C_0$	19.3 kN
Fatigue load limit $P_u$	0.815 kN
Calculation factor $k_r$	0.035
Calculation factor $f_0$	12.1
Mass bearing	0.54 kg